


iRV3-P Specifications

Overall Dimensions	6-3/4"(Φ) x 2-3/8"(D)
Mounting Dimensions	5-5/8"(Φ) x 2"(D)
Net Weight	1.92lbs(0.87kgs)
3.5" speaker	4Ω 20W
20mm Non-polar filament film speaker	4Ω 20W

iRV technologies


Operation Manual

In ceiling passive speaker

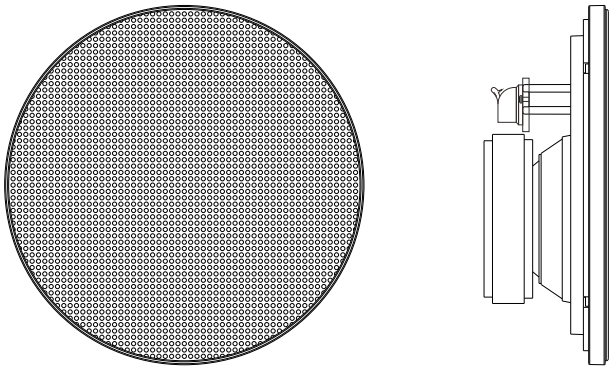


iRV3-P: White net cover
iRV3-PB: Black net cover

iRV3-P Features

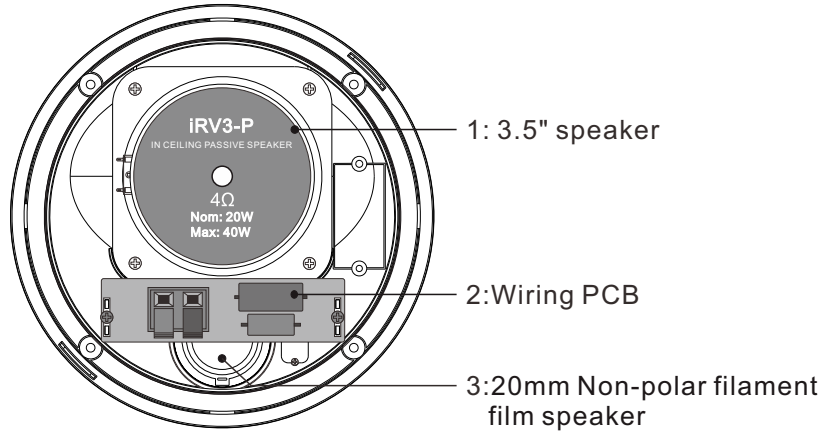

Wiring diagram

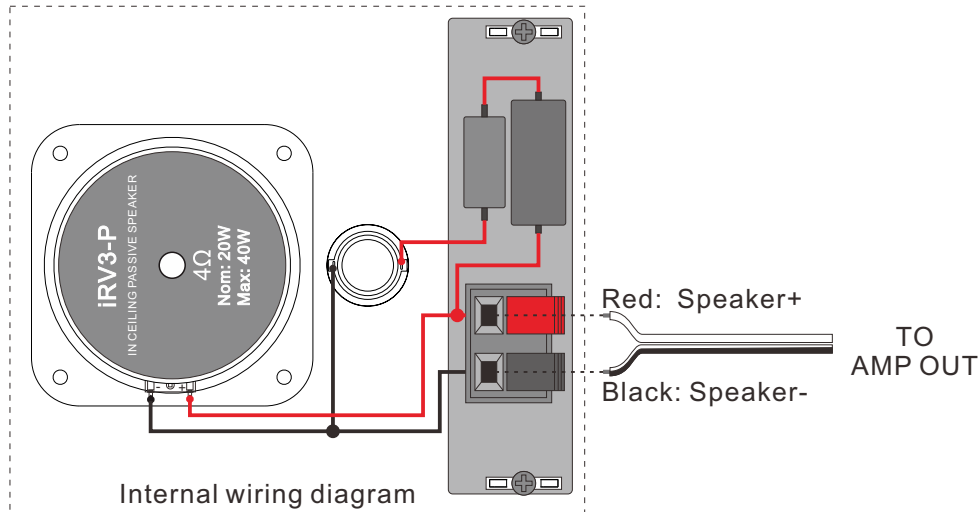


Attention: When connecting the output lines of the power amplifier, the positive and negative stages of the speakers on the two wiring card holders should not be connected incorrectly, as incorrect connections can cause poor sound.


INSTALLATION REQUIREMENTS

1. Installation requirements for mounting surface

It must be mounted on a strong and flat surface. Open a diameter 5-5/8" hole with depth 2" at least.

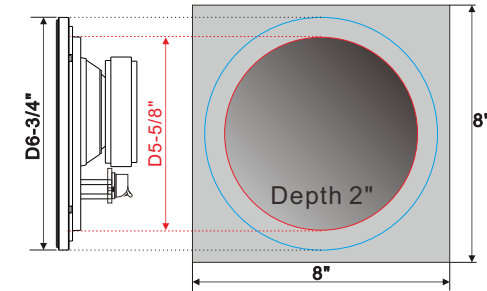

2. Requirement for installation direction

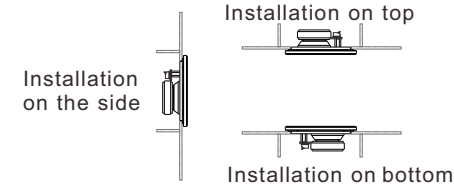

3. Install

After wiring as per diagram, use 4 mounting screws to tight the unit. Then install the net cover, press down the position of the four triangular icons, the net cover hook up the speaker body, the installation is complete.

If remove the net cover, find a triangle icon on the net cover, reach in with a flat-head screwdriver, and then rotate the screwdriver to the net cover inverted hook out. Find another triangle icon, repeat the step to the net cover inverted hook out, then the net cover is removed.

