


SLOW UP ROLLER SHADE

OPERATING AND INSTALLATION INSTRUCTIONS

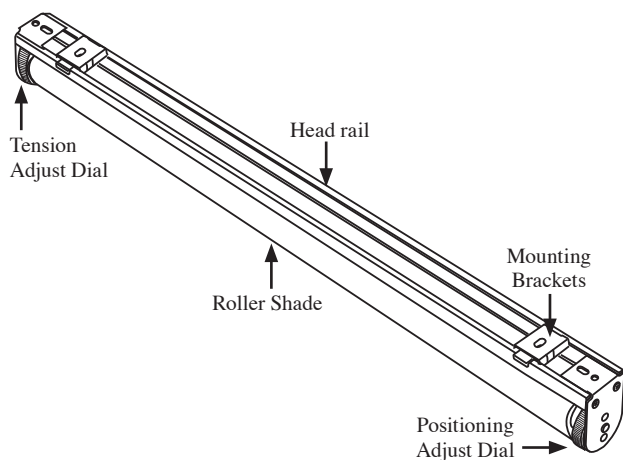

1. INSTALLATION

- Do not remove the shrink wrap from the shade until the unit is installed.
- **Shade positioning:** The shade should be positioned with the fabric going over the top and down the back of the shade. Make sure shade is level. (Fig. 1)
- With brackets attached to head rail, place shade into desired position and mark bracket locations by outlining the brackets' clear plastic button. Install shade so buttons are accessible after installation.
- Remove brackets by pressing clear button. (Fig. 2) Install the mounting brackets at the desired position. The clear plastic button is at the front of the bracket. (Fig. 3)
- Clip the back of the head rail onto the mounting brackets, and snap into place. (Fig. 4)



Fig. 1



Fig. 2




Fig. 3



Fig. 4

(Continued on back)

SLOW UP ROLLER SHADE

OPERATING AND INSTALLATION INSTRUCTIONS *(Continued)*

2. CONTROLS

Right side = positioning device

The Positioning Device controls the upper limits (stopping point). To make an adjustment, turn the dial clockwise (right side end view) to lower the limit. (Fig. 6) Turn counter clockwise to raise stopping. (Fig. 7)



Fig. 6



Fig. 7

Left side = tensioning device

The Tensioning Device controls the upward speed. To make an adjustment, turn the dial clockwise (left side end view) to increase speed. (Fig. 8) Turn counter clockwise to decrease speed. (Fig. 9)



Fig. 8



Fig. 9

For additional technical support, call 574-262-0954.

3. OPERATION

- To lower the shade, simply pull down on the shade hem bar.
- To raise the shade, pull down and release the hem bar. The shade will open. (Fig. 10)

NOTE: A quick tug is required to release the spring mechanism which will raise the fabric.

For additional technical support, call 574-262-0954.



Shade hem bar

Fig. 10



52878 Airport Parkway • Elkhart IN 46514
574-262-0954 • www.unitedshade.com